




megamount 48

AUTOMATIC
TYRE CHANGER
WITH SLIDING SYSTEM
AND LOCKING
CAPACITY UP TO 28"





Hofmann Megaplan tyre disassembly tool, essential but complete with all the necessary devices to allow the operator to work easily on all types of wheels. Smartly designed self-centring turntable is standard on all models.

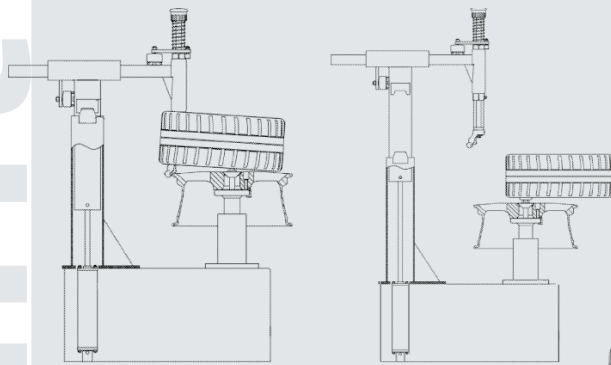

Automatic tyre changer with automatic vertical sliding column system, designed to reduce machine footprint and save space, allowing installation close to the wall



megamount 48

AUTOMATIC TYRE CHANGER
WITH SLIDING SYSTEM AND
LOCKING CAPACITY UP TO 28"



Locking capacity up to 28"

The heavy-duty turntable has a locking capacity from 9" to 28" and uses a direct clamping system, operated by 75 mm diameter cylinders, ensuring optimal clamping on all types of rim. The turntable is equipped with adjustable jaws featuring integrated plastic protection.

Handle-operated bead breaker up to 15"

Ergonomic bead breaker equipped with convenient lever controls for quick and effortless operation on wheels from 2" up to 15" width. Features an anti-crushing system that prevents the bead breaker from becoming trapped between the tyre and the rim.

Motoinverter

Motor controlled by Motoinverter system with progressive variation of speed from 0 to 16 rpm. The inverter board is installed on the machine, away from the engine to overcome vibration and heat problems. Low power consumption at rest with the intelligent stand-by. High reliability and protection, with automatic alarm reset bringing the pedal to the resting position (no power outages required).



Pedal operated inflating device

Pedal-operated inflating system, manometer and CE-certified inflation pressure limiter.



HELPING DEVICE SYSTEM HPX-DM

The *megamount48* is supplied with HPX-DM as standard. It is featuring a pneumatic selector for quick locking of the side roller and a dual-roller system designed to handle wheels of different sizes. Particularly suitable for working on large and extremely stiff Run-Flat and UHP tyres.

Standard accessories



Bead lever



Set of plastic protections
Tyre paste and brush
Tool tray - Roller

Optional accessories



Plastic mounting
head



Quick mounting
head




Motorcycle wheel
adapters



Run Flat clamp



Wheel lift

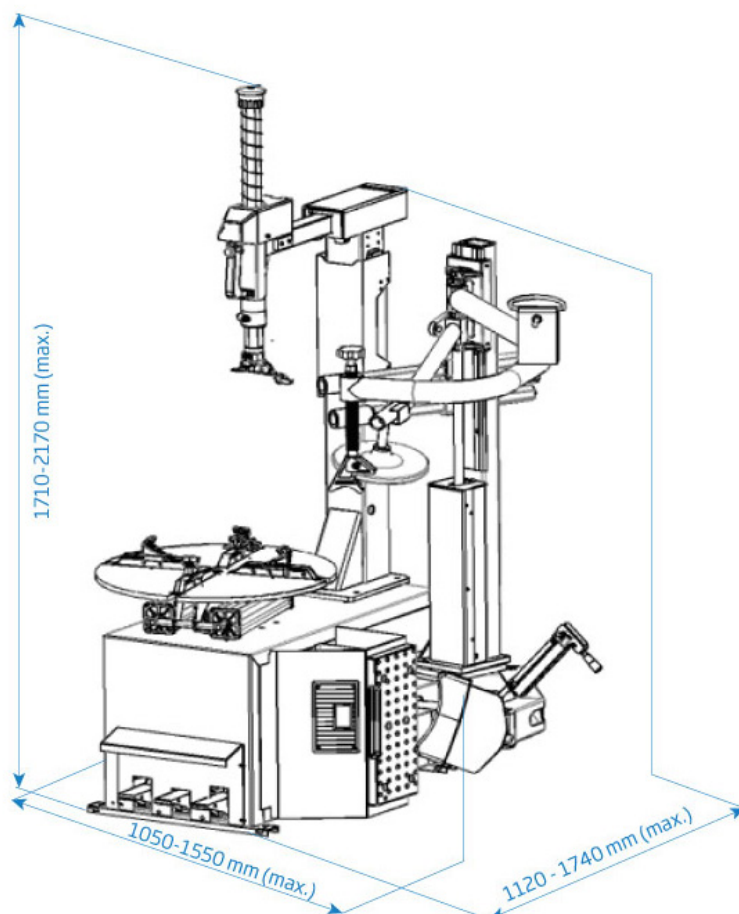

Technical data

Clamping capacity	9" - 28"
External clamping	9" - 26"
Internal clamping	11" - 28"
Max wheel diameter	1140 mm (44,5")
Max wheel width	390 mm (15")
Bead breaker force	15000N
Turntable speed	0-16 rpm
Operating pressure	8 - 10 bar (116 - 145 psi)
Noise level	< 70 ± 3 dB (A)
Net weight	290 kg (485 lbs)



HOFMANN MEGAPLAN UK
Unit 13, Brook Road, Bicton Industrial
Estate, Kimbolton, PE28 0LR.
www.hofmann-megaplan.co.uk